

LavaPort-PnP

ISA Bus Plug and Play Single 16650 Serial Port Board

Features & Benefits

- Adds one 9-pin 16650 UART serial port to ISA-equipped PCs
- Port is capable of a maximum data throughput rate up to 460.8 kbps
- Compliant with ISA Plug and Play Specification for easy jumperless installation
- Integrated 32-byte FIFO buffers with software configurable Rx/Tx triggers, 4x clock, and on-board flow control guarantee errorless data transmission even at top speed
- Easy Plug and Play installation — automatically selects next available IRQ and I/O address
- Compatible with RS-232 serial peripherals including 56K and ISDN modems, PDAs, digital cameras, bar-code scanners, and UPSes
- Ships with drivers for Windows 95/98/ME
- Lava Lifetime Warranty


Connectors

- One DB-9 male RS-232

System Requirements

- ISA host slot
- System support for ISA Plug and Play

Drivers ship with product. For updated software support visit www.lavalink.com.

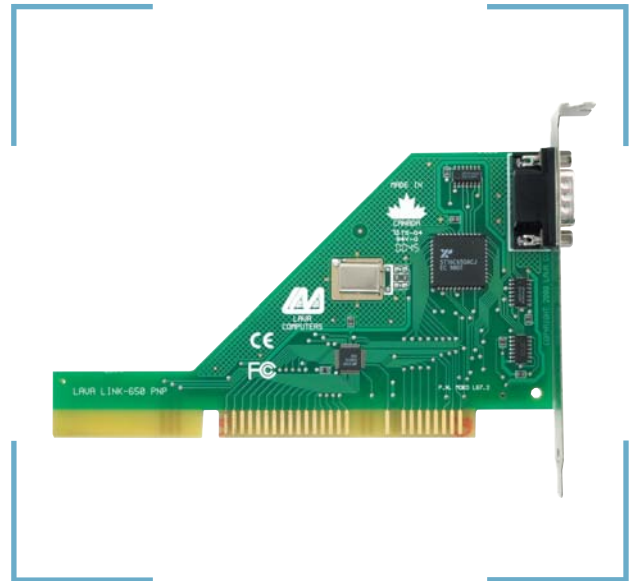

FC CE